

Kol. Opis

1 COMFORT 15-14 BXDT PM



Paznja! Slika proizvoda se može razlikovati od stvarnog proizvoda

Proizvodni broj: [99831281](#)

The high-efficiency Grundfos COMFORT BDT PM and BXDT PM pumps are designed for recirculation of domestic hot water in single

- and two-family houses securing hot water instantly to all faucets.

The pumps have a corrosion-resistant pump housing suitable for drinking water and are powered by a single-phase, high-efficiency ECM with permanent-magnet rotor.


The integrated digital timer has been developed for domestic hot-water recirculation in systems with either hot-water tanks or plate heat exchangers for hot-water production.

The timer allows you to customize the pump's operating periods, ensuring optimal comfort while lowering energy costs.





Additionally, the pump can be set to continuous operation 100 % for commissioning of the pump or 24 hours instant hot water.

COMFORT BXDT PM has a built-in isolating valve and a non-return valve (fitting). This ensures that maintenance can be carried out without draining the system. The non-return valve also prevents reversed flow during operation.


99831281 COMFORT 15-14 BXDT PM

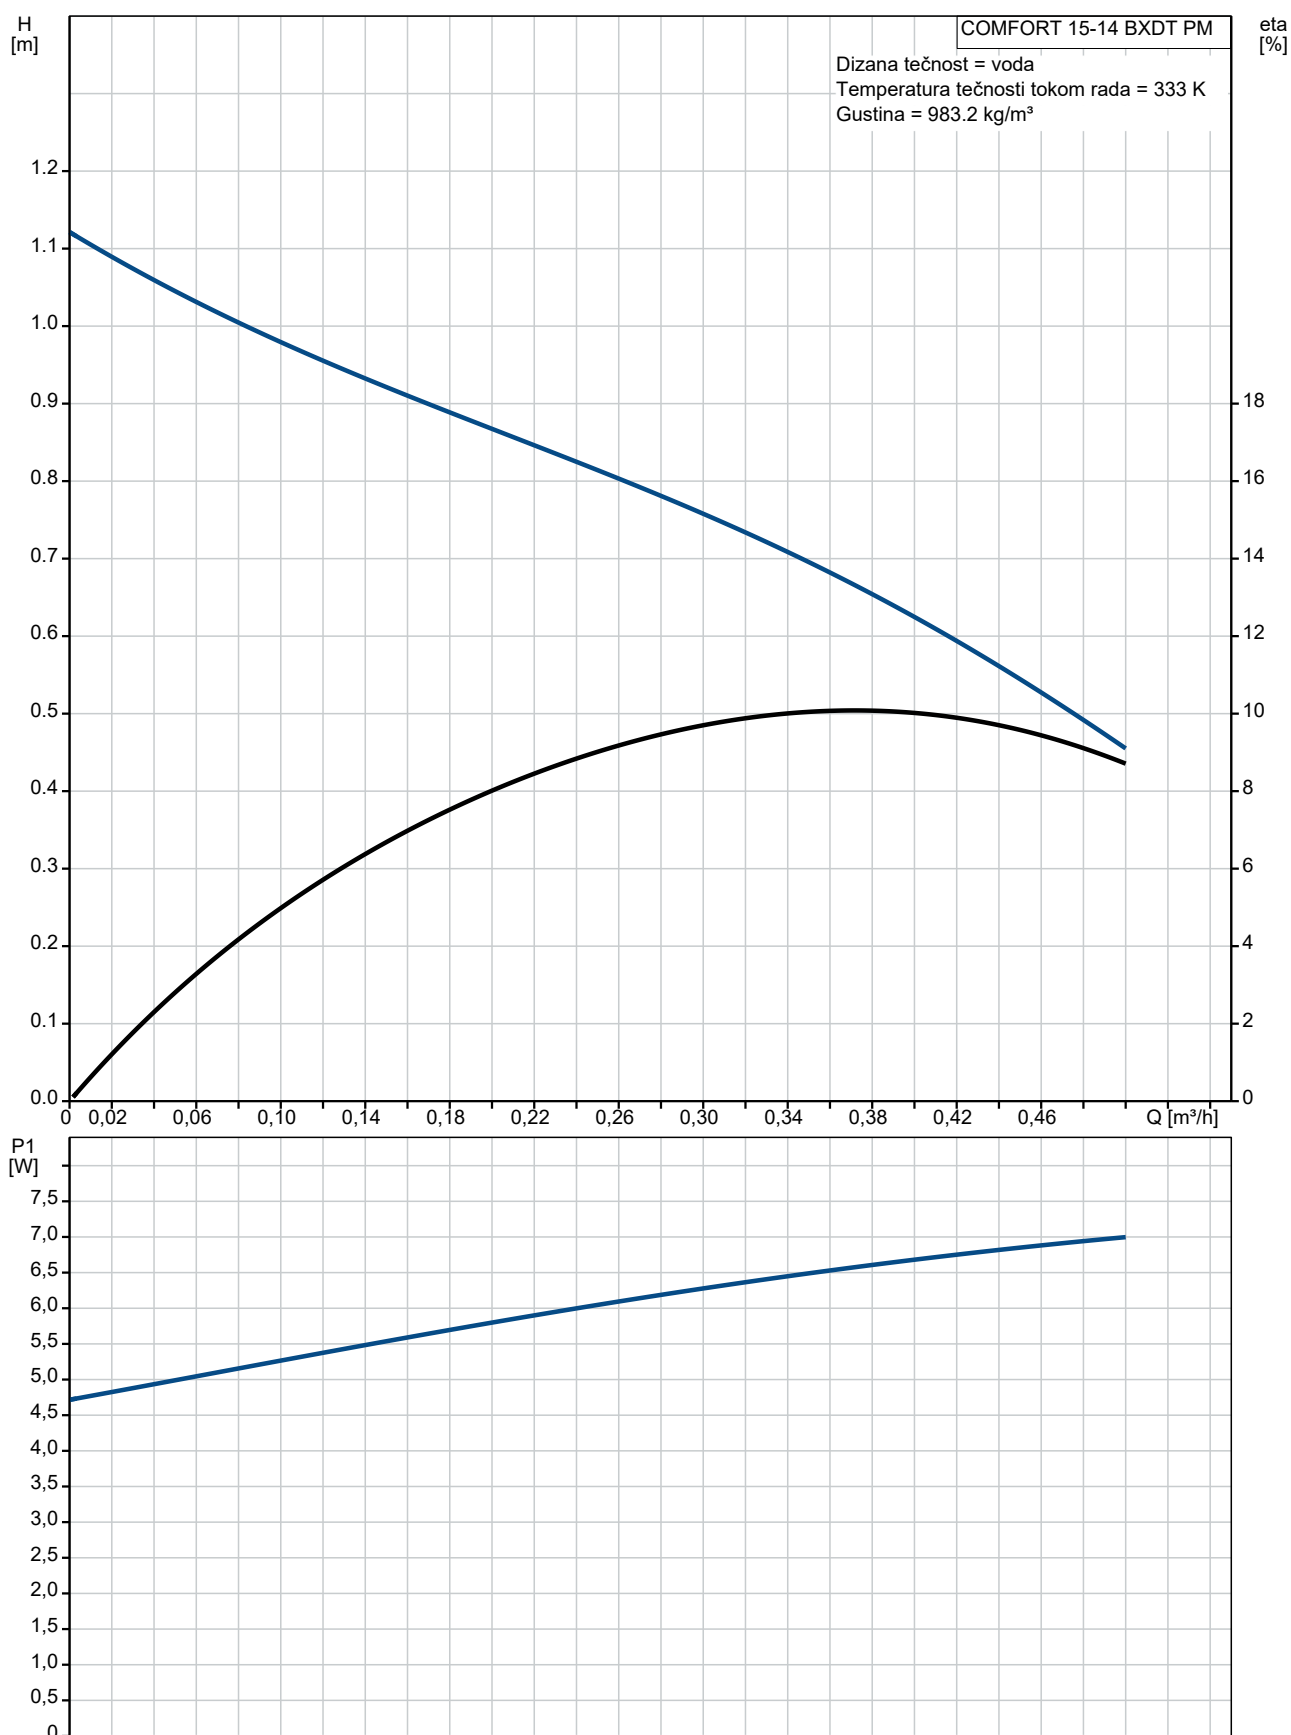

Opis	Vrednost
Opšte informacije:	
Ime proizvoda::	COMFORT 15-14 BXDT PM
Šifra proizvoda:	99831281
EAN broj::	5713834895494
Cena:	
Tehnički:	
Broj brzina:	1
Visina max.:	1.4 m
TF klasa:	95
Saglasnosti na natpisnoj pločici:	CE,VDE,EAC,WEEE
Ventil:	pumpa sa ugrađenim izolacionim i nepovratnim ventilom
Materijali:	
Kućiste pumpe:	Mesing
Rotor:	Kompozitno
Ugradnja:	
Maksimalni radni pritisak:	1000 kPa
Type of connection:	G
Dimenzija izlaza pumpe:	1
Dužina ugrađivanja:	140 mm
Tečnost:	
Dizana tečnost:	voda
Raspon temperature tečnosti:	275 .. 368 K
Selected liquid temperature:	333 K
Gustina:	983.2 kg/m³
Elektro podaci:	
Max. ulazna snaga:	7 W
Frekvencija struje:	50 / 60 Hz
Rated voltage:	230 V
Utrošak struje u brzini 3:	0.07 A
Klasa zaštite (IEC 34-5):	IP44
Klasa izolacije (IEC 85):	F
Zaštita motora:	ELEKT.
Termička zaštita:	Impedansna zaštita
Ostali:	
Neto masa:	1.14 kg
Bruto masa:	1.24 kg
Swedish RSK No.:	5790549

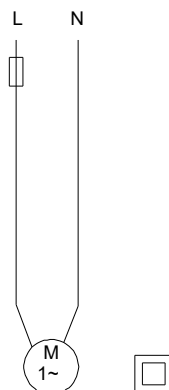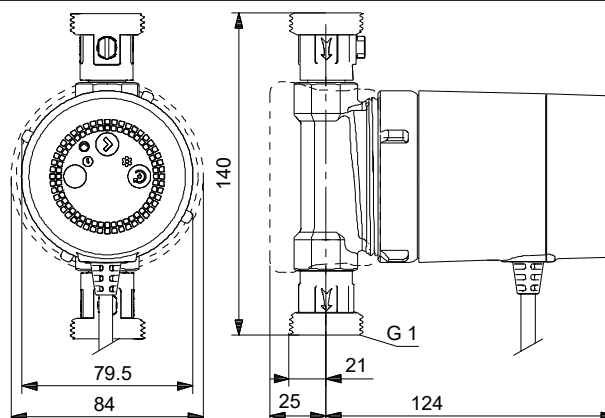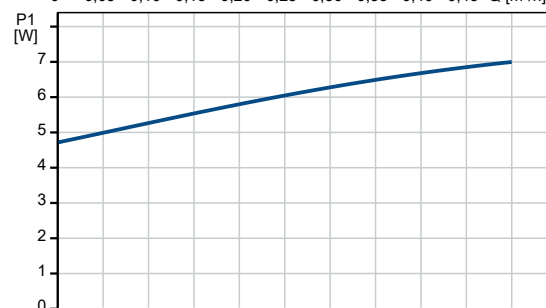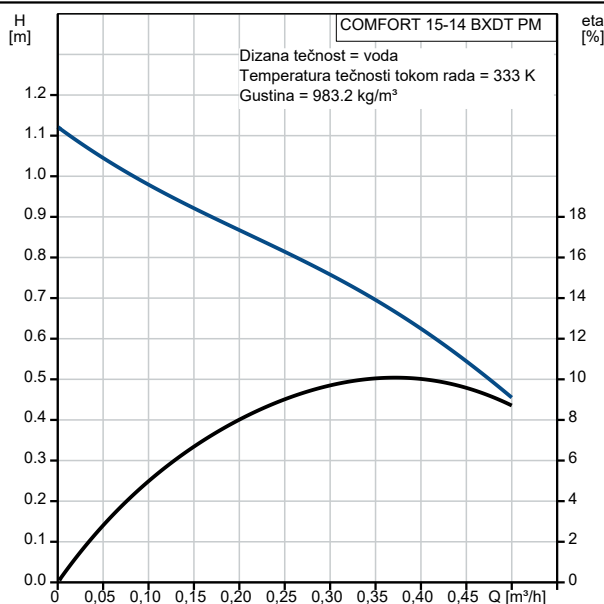

99831281 COMFORT 15-14 BXDT PM

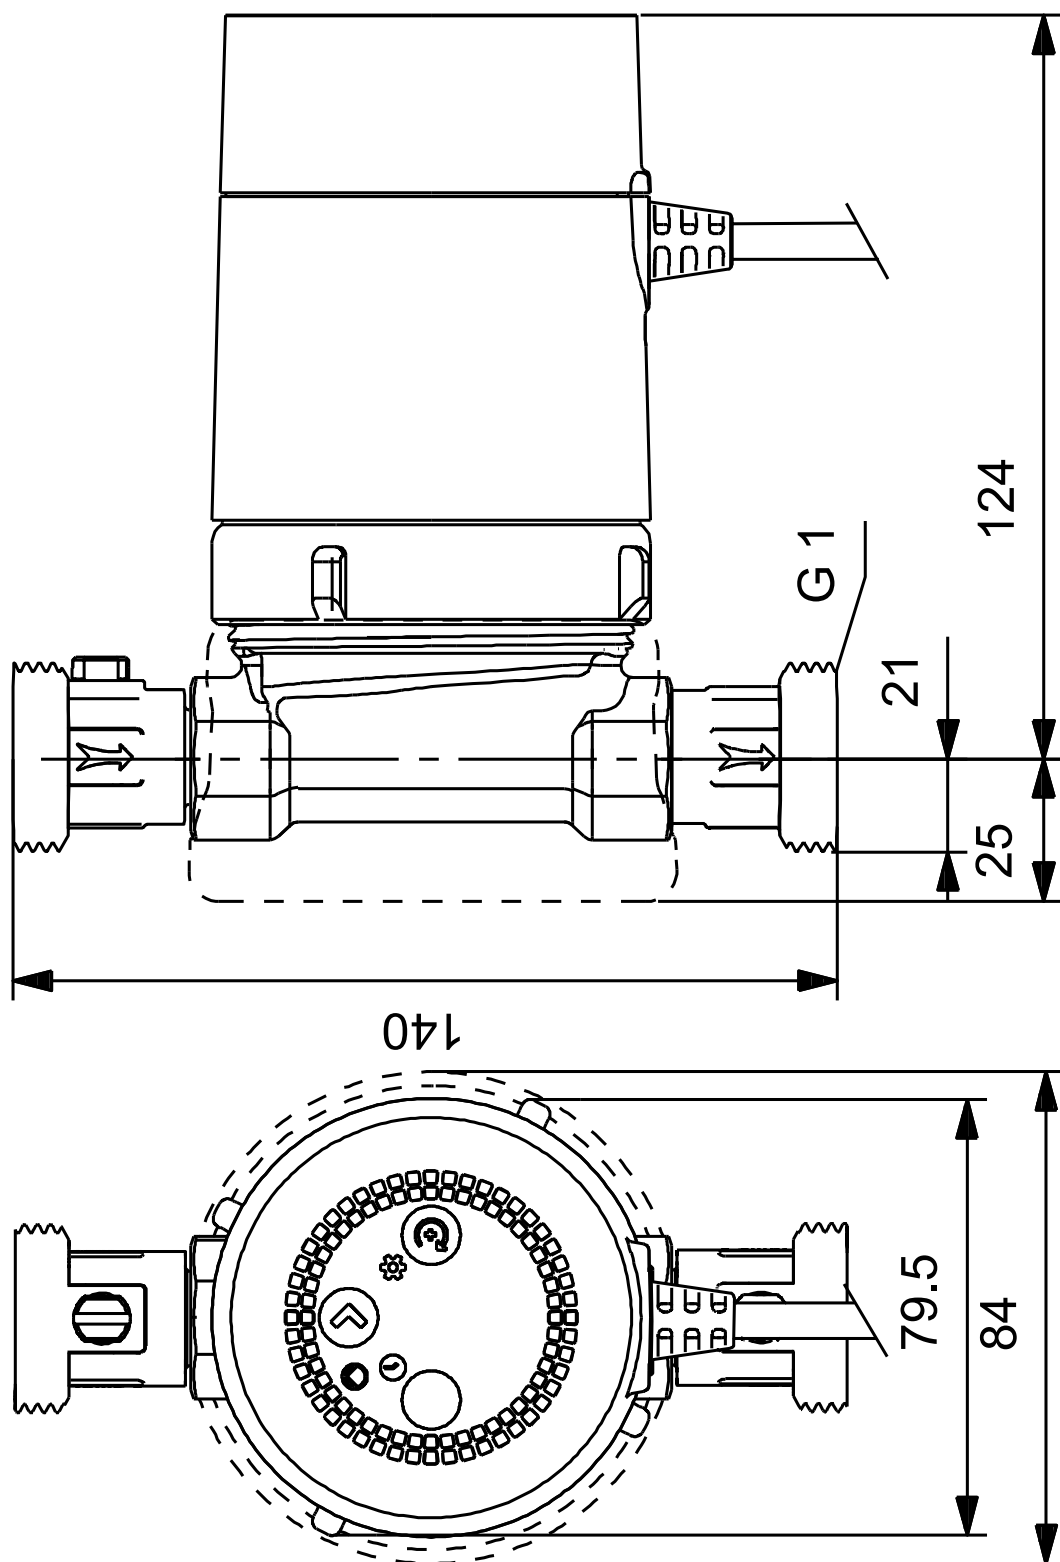

Napomena! Sve jedinice su u [mm] ukoliko drugačije nije navedeno.
Upozorenje: Ovaj pojednostavljeni dimenzioni crtež ne pokazuje sve detalje.

99831281 COMFORT 15-14 BXDT PM

