

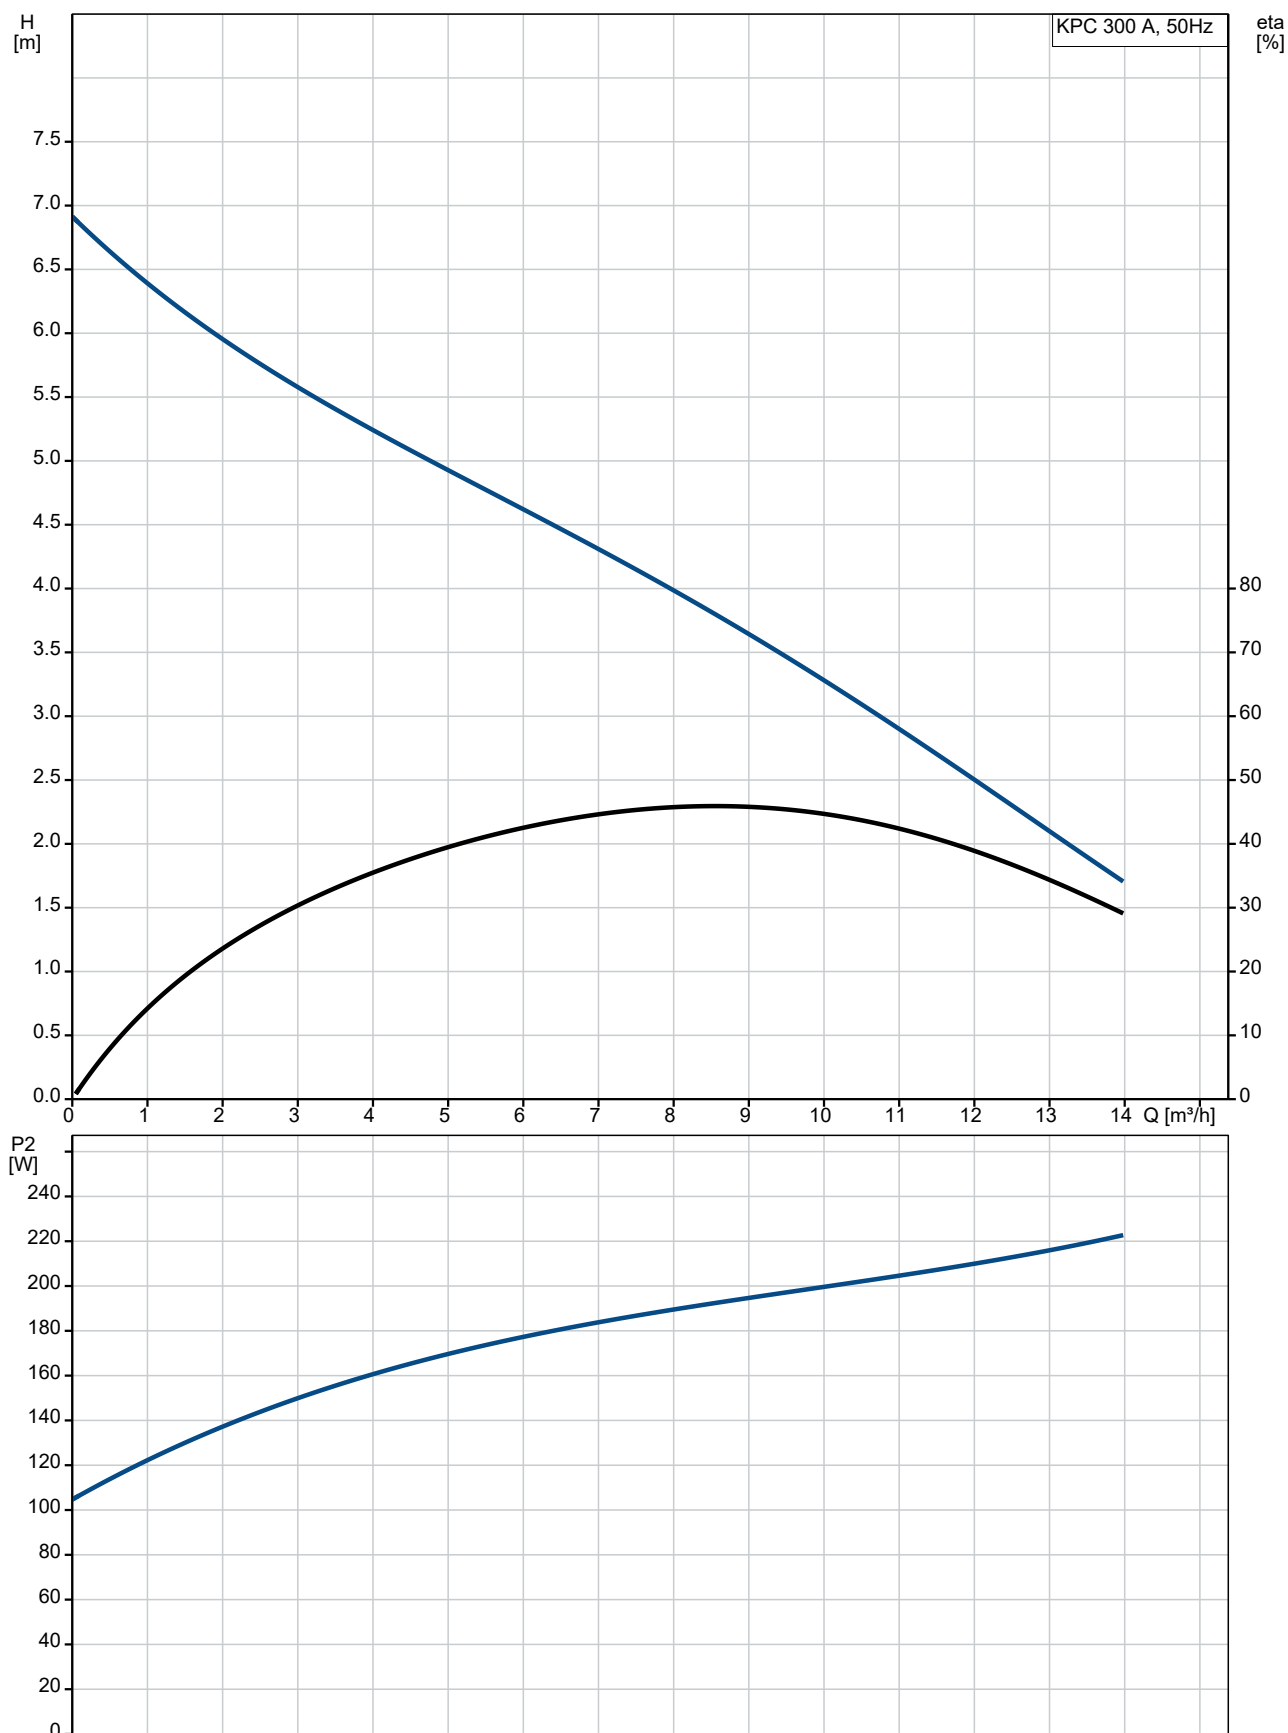

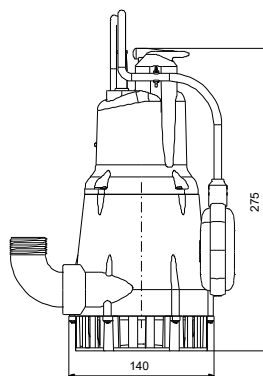


Kol.	Opis
1	KPC 300 A  Paznja! Slika proizvoda se može razlikovati od stvarnog proizvoda Proizvodni broj: 98863989 The KPC 300 and 600 are designed mainly for automatically operated, permanent domestic applications for draining basements and garages, which are subject to flooding. Thanks to its compact, easy-to-handle design, it can also be used as a portable pump for emergencies such as lifting water from tanks or rivers, emptying swimming pools, fountains, excavations and underpasses. It is also ideal for gardening and hobbies in general. The level switch allows permanent installation and guarantees automatic pump operation. Tečnost: Dizana tečnost: bilo koja viskozna tečnost Raspon temperature tečnosti: 273 .. 308 K Gustina: 998.2 kg/m³ Tehnički: Maksimalna veličina čestica: 10 mm Materijali: Kućište pumpe: NORYL GFN2 Rotor: NORYL GFN2 Ugradnja: Izlaz pumpe: Rp 1 1/4 Maksimalna dubina instaliranja: 7 m Elektro podaci: Potrebna snaga - P1: 350 W Frekvencija struje: 50 Hz Potrebni napon: 1 x 220-240 V Nazivna struja: 1.5 A Veličina kondenzatora - radni: 8 µF/450 V Klasa zaštite (IEC 34-5): IP68 Klasa izolacije (IEC 85): F Dužina kabla: 10 m Tip kablovskog utikača: SCHUKO Ostali: Neto masa: 4.1 kg Bruto masa: 4.6 kg Transportna zapremina: 0.016 m³ Country of origin: HU Custom tariff no.: 84137021


98863989 KPC 300 A 50 Hz

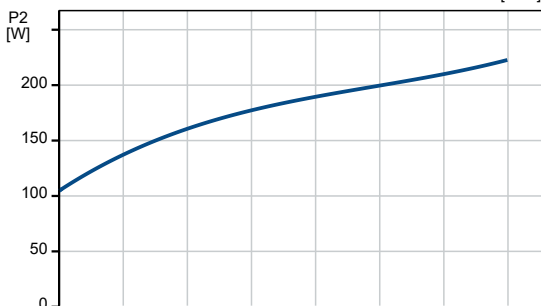

Opis	Vrednost
Opšte informacije:	
Ime proizvoda::	KPC 300 A
Šifra proizvoda:	98863989
EAN broj::	5712602587920
Cena:	€ 151.77
Tehnički:	
Maximum flow:	13 m³/h
Max. protok:	13 m³/h
Visina max.:	6.5 m
Maksimalna veličina čestica:	10 mm
Model:	A
Materijali:	
Kućište pumpe:	NORYL GFN2
Rotor:	NORYL GFN2
Ugradnja:	
Izlaz pumpe:	Rp 1 1/4
Maksimalna dubina instaliranja:	7 m
Tečnost:	
Dizana tečnost:	bilo koja viskozna tečnost
Raspon temperature tečnosti:	273 .. 308 K
Gustina:	998.2 kg/m³
Elektro podaci:	
Potrebna snaga - P1:	350 W
Frekvencija struje:	50 Hz
Potrebni napon:	1 x 220-240 V
Nazivna struja:	1.5 A
Veličina kondenzatora - radni:	8 µF/450 V
Klasa zaštite (IEC 34-5):	IP68
Klasa izolacije (IEC 85):	F
Termička zaštita:	interni
Dužina kabla:	10 m
Tip kablovskog utikača:	SCHUKO
Kontrole:	
Sklopka nivoa:	A/WITH
Ostali:	
Neto masa:	4.1 kg
Bruto masa:	4.6 kg
Transportna zapremina:	0.016 m³
Country of origin:	HU
Custom tariff no.:	84137021

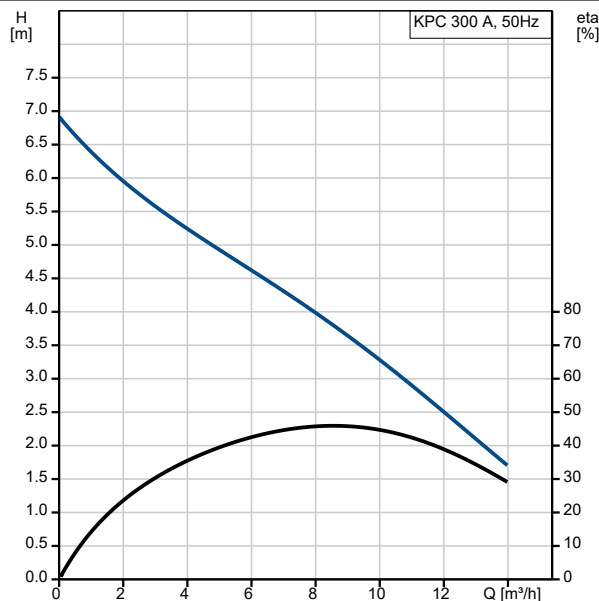


98863989 KPC 300 A 50 Hz

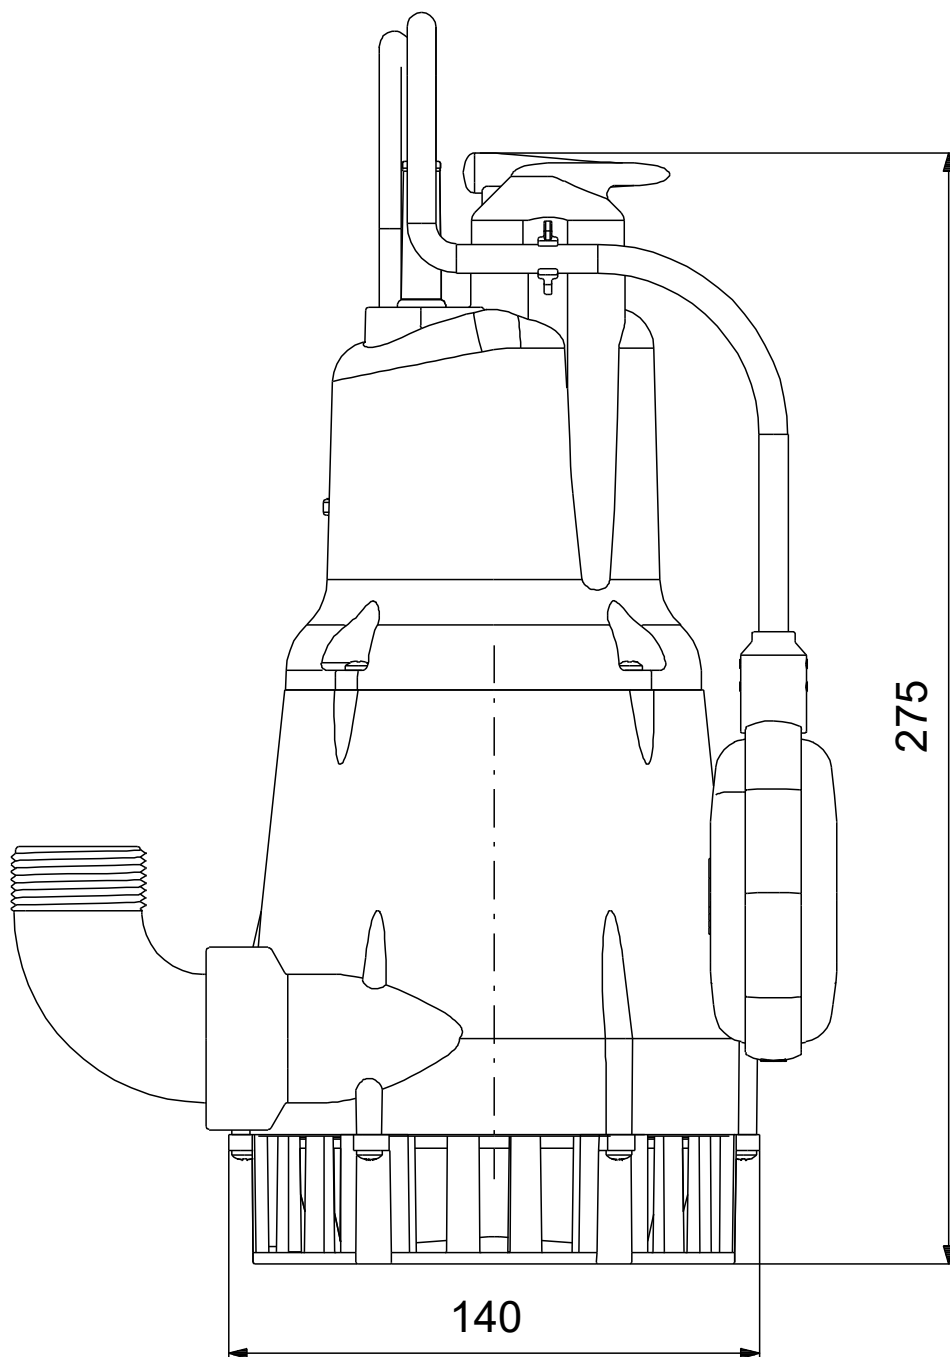

Napomena! Sve jedinice su u [mm] ukoliko drugačije nije navedeno.
Upozorenje: Ovaj pojednostavljeni dimenzioni crtež ne pokazuje sve detalje.

98863989 KPC 300 A 50 Hz

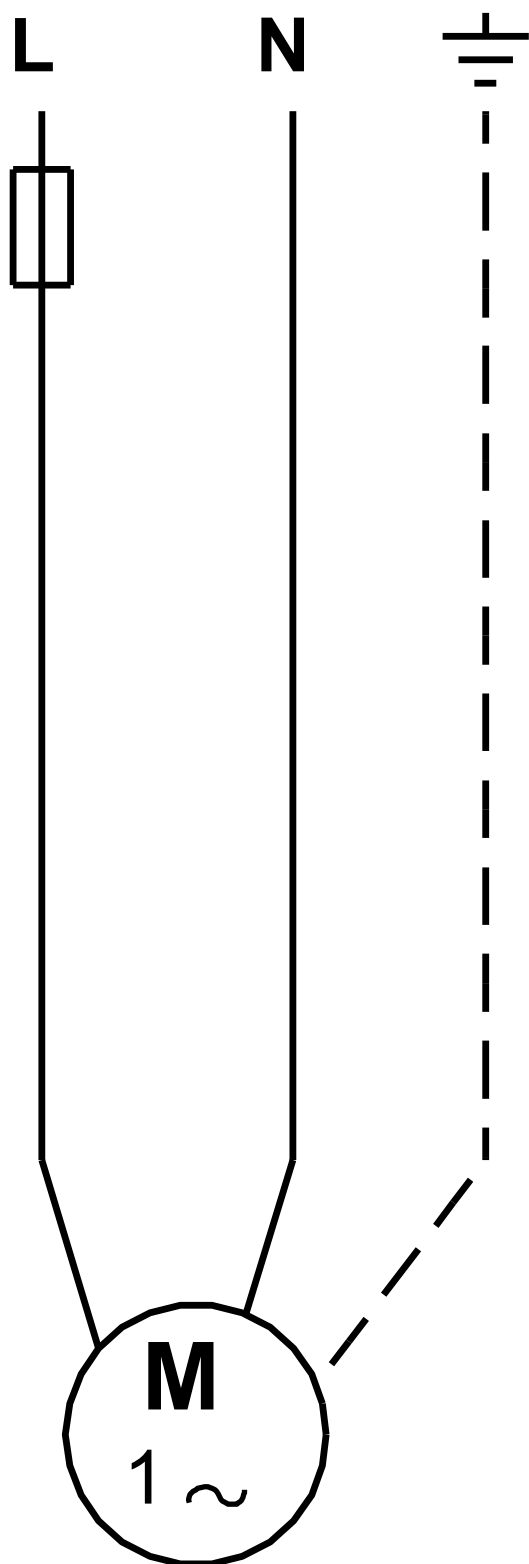

Pažnja! Sve jedinice su u [mm] ukoliko nije rečeno drugačije.